

LT 160

LT Range: 20 MHz - 1000 MHz / 160 W CW



Prana LT 160

- Class A solid state
- Broadband (instantaneous single band): 20 MHz – 1000 MHz
- Typical output power :160 W CW
- Linear output power (1 dB compression) guaranteed with harmonics <-20 dBc:
 - P1dB > 80 W and H < -20 dBc from 30 MHz to 80 MHz and
 - P1dB > 140 W and H < -20 dBc from 80 MHz to 500 MHz and
 - P1dB > 100 W and H < -20 dBc from 500 MHz to 1000 MHz
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Upgradable to LT 320 possible (7U)
- Reliable, efficient and robust
- 19" Rack
- 3 years standard warranty

Maintenance

- Amplifier designed for minimal maintenance
 - Easy access to all parts
 - Modular design
 - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

Versions

- LT 160 S : standard amplifier
- LT 160 D amplifier with:
 - Display
 - Digital control
 - IEEE 488 GPIB Communication
- LT 160 SC : LT 160 S with
 - Integrated bidirectional coupler
- LT 160 DC : LT 160 D with :
 - Integrated bidirectional coupler
 - display of instantaneous power

LT Range

- LT 90 => 90 W CW
- LT 160 => 160 W CW
- LT 320 => 320 W CW
- LT 600 => 600 W CW


Extra

- External coupler
- Supply and integration inside a cabinet
- RF Power cable
- Switching unit

LT 160

LT Range: 20 MHz - 1000 MHz / 160 W CW

LT160 POWER AMPLIFIER 160W / 20 MHz - 1000 MHz

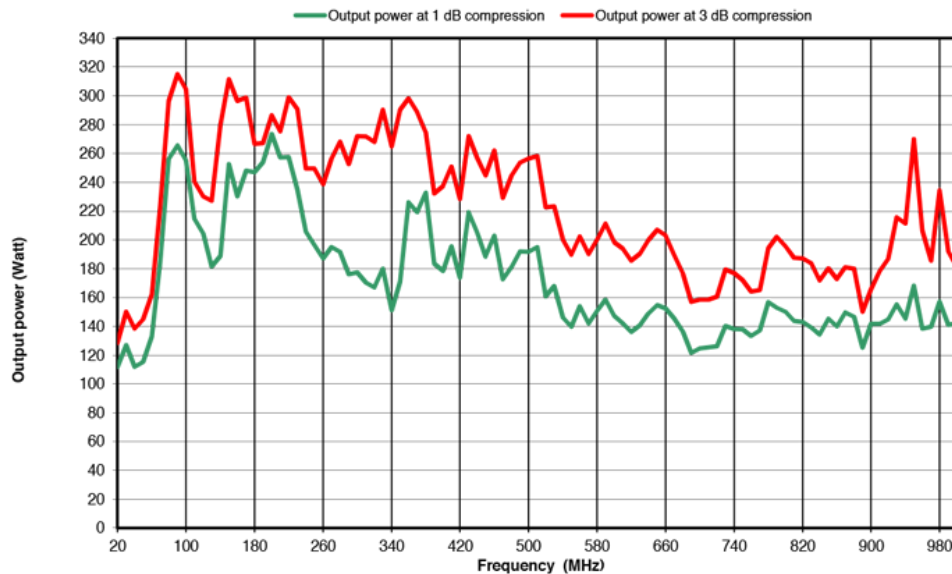

Specifications

Frequency bandwidth	20 MHz - 1000 MHz
Typical output power	160 W
Power at 3 dB compression	95W min up to 80 MHz/ 200W min from 80 to 500 MHz/ 120W min from 500 to 1000 MHz
Power at 1 dB compression	80W min up to 80 MHz/ 140W min from 80 to 500 MHz/ 100W min from 500 to 1000 MHz
Harmonics distortion	H2,H3 < -20 dBc for the output power at 1 dB compression limit
Class type	Class A
Gain	51 dB
Linear power gain flatness	± 3.5 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1max
Output impedance	50 ohms / VSWR: 2:1max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type N fem. (front or rear panel) – other connector type on request
Ambient operating temperature	0 °C / + 45 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air with fan speed control (for D version): 60 l/sec max. (self contained fans)
Power voltage	90-250 VAC, 47-63 Hz, single phase
Rated current	11.8 A at 110 VAC / 5.6 A at 230 VAC
Dimensions	640 x 450 x 178 mm (4U) / 25.2 x 17.7 x 7 in (4U)
Weight	28 kg / 67 lb

LT 160 D version :

Safety interlock	Connector type BNC
Digital control	Transistors, power supplies, temperatures and fans
Communication interface	Ethernet, USB, GPIB, RS232
Color LCD display with touch screen	Status, faults, (direct and reverse instantaneous power for DC version)

LT 160 SC and LT 160 DC versions :

Integrated bidirectional power coupler	Coupling factor 40 dB typ. (SC version) / 49 dB typ. (DC version)
Power coupling connector	Type N fem. (front or rear panel)
Estimated output power losses due to the coupler	0.3 dB