

# AS-02

Antenna Set 30 MHz to 3 GHz



## Main Features

- 30 MHz to 3 GHz frequency range
- Excellent Antenna Factor
- Tripod adapter for easy vertical-horizontal polarization change
- Individual calibration
- Robust, rustproof aluminium construction
- Lightweight

AS-02 is a compact size broadband Antenna System composed of a BC-01 Biconical Dipole and LP-02 Log Periodic Dipole Array designed for radiated emissions and immunity testing.

It can be used in conjunction with any receiver or spectrum analyzer.

Its ideal companion is the EMI Receiver Unit 9030 that can be easily mounted on the antenna mast (\*).

(\*The direct connection between antenna and PMM Receiver Unit eliminates additional sources of uncertainties due to coaxial cable attenuation and scattering. For further information please consult our brochure "Fully CISPR-Compliant Digital EMC/EMI receivers 10 Hz to 18 GHz".


# AS-02

## Antenna set 30 MHz to 3 GHz


SPECIFICATIONS	BC-01	LP-02
Frequency range	30 to 200 MHz	200 MHz to 3 GHz
Gain	-15 +2 dBi typical	6 dBi typical
Antenna factor	8 to 14 dB/m typical	13 to 36 dB/m typical
Max input power	100 W	100 W up to 1 GHz 50 W up to 3 GHz
Connector	N-female	N-female
Dimensions LxHxW	65 x 65 x 137 cm	70 x 10 x 86 cm
Weight	1,8 Kg	1,1 Kg
Colour	RAL 7035	
Impedance	50 Ω nominal	
Construction	Aluminium	



LP-02 on tripod

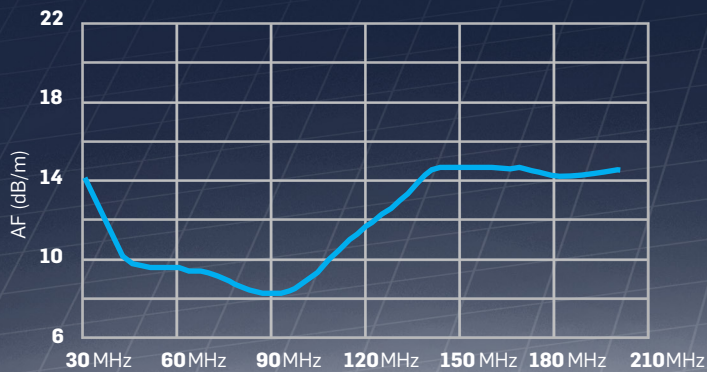

BC-01 - Antenna Factor @ 10m

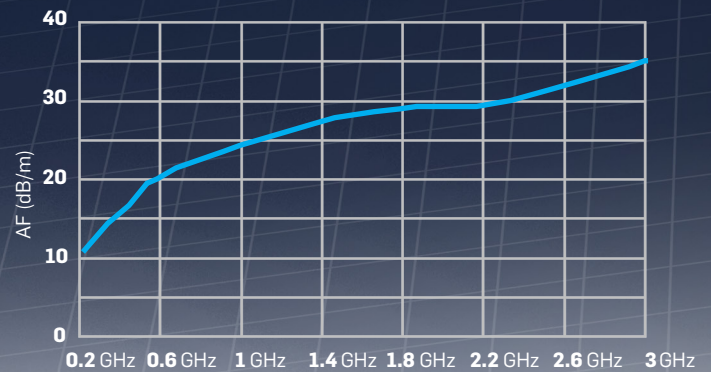

LP-02 - Antenna Factor @ 10m

### Ordering Information:

Biconical antenna BC-01 with individual calibration report  
 Biconical antenna BC-01/TC with typical calibration report  
 Log-periodic Antenna LP-02 with individual calibration report  
 Log-periodic Antenna LP-02/TC with typical calibration report  
 Includes: Operating Manual, Soft Carrying Case, TR-01 Wooden tripod extensible with mounting support, Calibration Reports, RF Cable length 5 m

### Optional accessories:

TR-01 Wooden tripod extensible 60 - 180 cm with antenna mounting adapter for fast horizontal to vertical polarization changing  
 RF Cable/5 RF cable, N-N connector, length 5 m

## Related Products

### Receivers

- 7010/00: EMI receiver 150 kHz to 1 GHz
- 7010/01: EMI receiver 9 kHz to 1 GHz
- 9010: EMI receiver 10 Hz to 30 MHz
- 9010F: EMI receiver 10 Hz to 30 MHz
- 9010/03P: EMI receiver 10 Hz to 300 MHz
- 9010/30P: EMI receiver 10 Hz to 3 GHz
- 9010/60P: EMI receiver 10 Hz to 6 GHz
- 9030: EMI Receiver 30 MHz to 3 GHz
- 9060: EMI Receiver 30 MHz to 6 GHz

### Antennas

- DR-01: Double-ridged horn antenna 6 to 18 GHz
- LP-03: Log Periodic Antenna 800 MHz to 6 GHz
- TR-01: Antenna Tripod
- VDH-01: Van der Hoofden test-head 20 kHz to 10 MHz
- Antenna Set AS-03 (BC01+LP02+TR01)
- RA01: Rod Antenna 9 kHz to 30 MHz
- RA01-HV: Rod Antenna 150 kHz to 30 MHz
- RA01-MIL: Rod Antenna 9 kHz to 30 MHz

### Calibrations service

- Ansi 63.5 Antenna Factor
- SAE ARP 958-D
- Free-Space Antenna Factor

Sales Office:  
 Via Leonardo da Vinci, 21/23  
 20090 Segrate (Milano) - ITALY  
 Phone: +39 02 2699871  
 Fax: +39 02 26998700



E-Mail: [nardait.support@L-3com.com](mailto:nardait.support@L-3com.com)  
 Internet: [www.narda-sts.it](http://www.narda-sts.it)

Headquarter:  
 Via Benessea, 29/B  
 17035 Cisano sul Neva (SV) - ITALY  
 Phone: +39 0182 58641  
 Fax: +39 0182 586400