


# BC-01

Biconical antenna 30 to 200 MHz

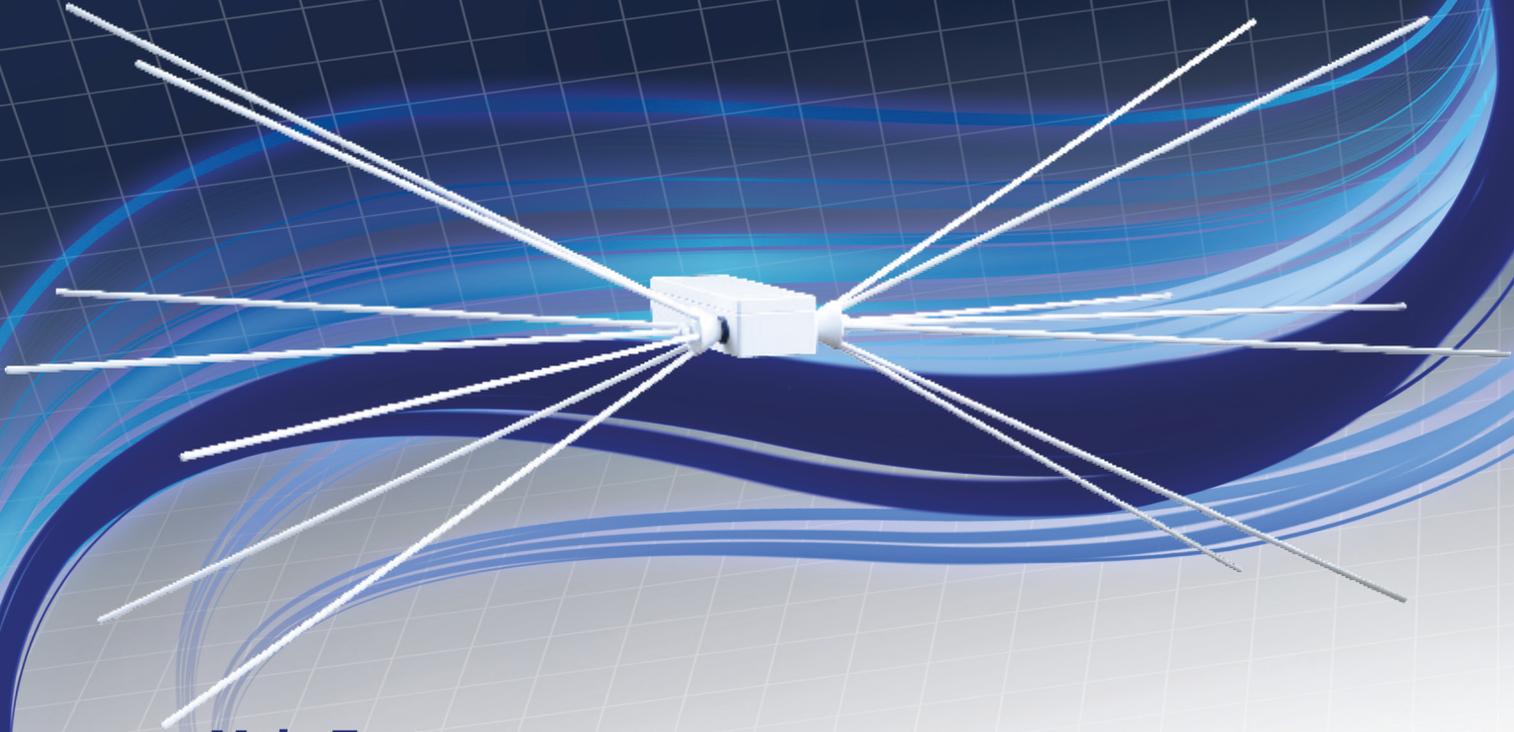

## Main Features

- 30 to 200 MHz frequency range
- Excellent antenna factor
- Tripod adapter for easy vertical-horizontal polarization change
- Individual calibration
- Robust, rustproof aluminium construction
- Lightweight

BC-01 is a biconical antenna designed for radiated emissions and immunity testing that can be used in conjunction with any receiver or spectrum analyzer.

Its ideal companion is the EMI Receiver Unit 9030 or 9060, which can be easily mounted on the antenna mast.\*

\*The direct connection between antenna and PMM receiver eliminates additional sources of uncertainties due to coaxial cable attenuation and scattering. For further information please consult our brochure "Fully CISPR-Compliant Digital EMC/EMI receivers 10 Hz to 18 GHz".



L3HARRIS


narda   
Safety Test Solutions

# BC-01


Biconical antenna 30 to 200 MHz

## SPECIFICATIONS

Frequency range	30 to 200 MHz
Impedance	50 $\Omega$ nominal
Gain	-15 +2 dBi typical
Antenna factor	8 to 14 dB/m typical
Construction	Aluminium
Max input power	100 W
Connector	N female
Dimensions (L x H x W)	65 x 65 x 137 cm
Weight	1,8 kg
Colour	RAL 7035

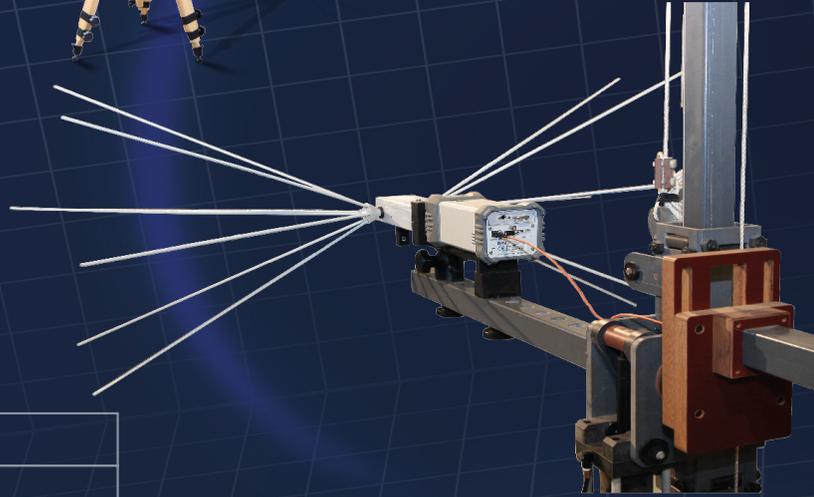

BC-01 with 9030

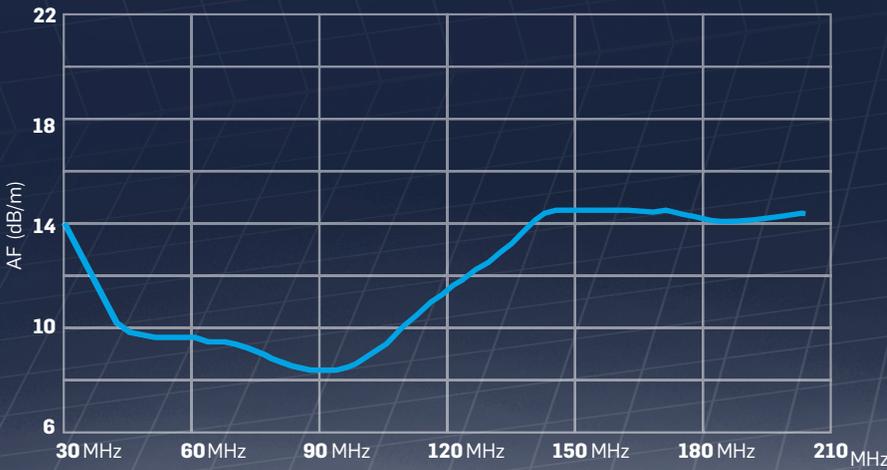

BC-01 - Antenna Factor @ 10m

## Ordering information:

**BC-01** Biconical antenna with individual calibration report

**BC-01/TC** Biconical antenna with typical calibration report

Includes: user's manual, soft carrying case, calibration report

## Optional accessories:

### TR-01 set

Includes: TR01 60-180 cm wooden column extendable tripod,

antenna mounting adapter to change polarization, soft carrying case

5 meter/6 GHz/N(m)-N(m) **RF cable**

Antenna Mounting kit **AMK-01**

## Related products and services

### Receivers

- 7010/00: EMI Receiver 150 kHz to 1 GHz
- 7010/01: EMI Receiver 9 kHz to 1 GHz
- 7010/03: EMI Receiver 9 kHz to 3 GHz
- 9010: EMI Receiver 10 Hz to 30 MHz
- 9010F: EMI Receiver 10 Hz to 30 MHz
- 9010/03P: EMI Receiver 10 Hz to 300 MHz
- 9010/30P: EMI Receiver 10 Hz to 3 GHz
- 9010/60P: EMI Receiver 10 Hz to 6 GHz
- 9030: EMI Receiver 30 MHz to 3 GHz
- 9060: EMI Receiver 30 MHz to 6 GHz
- FR-4003: Field Receiver 9 KHz to 30 MHz

### Antennas

- BL-01: Biconical Log Periodic Antenna 30 MHz to 6 GHz
- DR-01: Double-ridged Horn Antenna 6 to 18 GHz
- LP-02: Log Periodic Antenna 200 MHz to 3 GHz
- LP-03: Log Periodic Antenna 800 MHz to 6 GHz
- LP-04: Log Periodic Antenna 200 MHz to 6 GHz
- TR-01: Antenna Tripod
- VDH-01: Van der Hoofden Test Head 20 kHz to 10 MHz
- Antenna Set AS-02 (BC01+LP02+TR01)
- Antenna Set AS-03 (BC01+LP02+LP03+TR01)
- Antenna Set AS-04 (BC01+LP04+TR01)
- Antenna Set AS-05 (BC01+LP04+DR01+TR01)
- Antenna Set AS-06 (BC01+LP-02+LP03+DR01+TR01)
- Antenna Set AS-07 (BL01+TR01)
- Antenna Set AS-08 (BL01+DR01+TR01)
- RA-01: Rod Antenna 9 kHz to 30 MHz
- RA-01-HV: Rod Antenna 150 kHz to 30 MHz
- RA-01-MIL: Rod Antenna 9 kHz to 30 MHz

### Calibration services

- Ansi 63,5 Antenna Factor
- SAE ARP 958-D
- Free-Space Antenna Factor



L3HARRIS



Sales:  
Via Rimini, 22  
20142 Milano - ITALY  
Phone: +39 02 581881  
Fax: +39 02 58188273

E-Mail: [nardait.support@L3Harris.com](mailto:nardait.support@L3Harris.com)  
Internet: [www.narda-sts.it](http://www.narda-sts.it)

Headquarters:  
Via Benessea, 29/B  
17035 Cisano sul Neva (SV) - ITALY  
Phone: +39 0182 58641  
Fax: +39 0182 586400