

# AS-08

Antenna Set 30 MHz to 18 GHz



## Main Features

- 30 MHz to 18 GHz frequency range
- Excellent antenna factor
- Tripod adapter for easy vertical-horizontal polarization change
- Individual calibration
- Robust, rustproof aluminium construction
- Lightweight

AS-08 is a compact broadband antenna set composed of a BL-01 Bi-Conical Log-periodic Dipole and DR-01 Double Ridged Horn Antenna designed for radiated emissions and immunity testing that can be used in conjunction with any receiver or spectrum analyzer.


Its ideal companion is the EMI Receiver Unit 9060 or 9180, which can be easily mounted on the antenna mast.\*

\*The direct connection between antenna and PMM receiver eliminates additional sources of uncertainties due to coaxial cable attenuation and scattering. For further information please consult our brochure "Fully CISPR-Compliant Digital EMC/EMI receivers 10 Hz to 18 GHz".

# AS-08

## Antenna set 30 MHz to 18 GHz

SPECIFICATIONS	BL-01	DR-01
Frequency range	30 MHz to 6 GHz	6 to 18 GHz
Gain	-9 to +5 dBi typical	9 to 16 dBi typical
Antenna factor	8 to 45 dB/m typical	36 to 41 dB/m typical
Max input power	100 W @ 1 GHz 50 W @ 6 GHz	150 W
Connector	N female	N female
Dimensions (L x H x W)	145 x 61 x 157 cm	55 x 44 x 177 mm
Weight	5,5 kg	0,25 kg
Colour	RAL 7035	
Impedance	50 Ω nominal	
Construction	Aluminium	

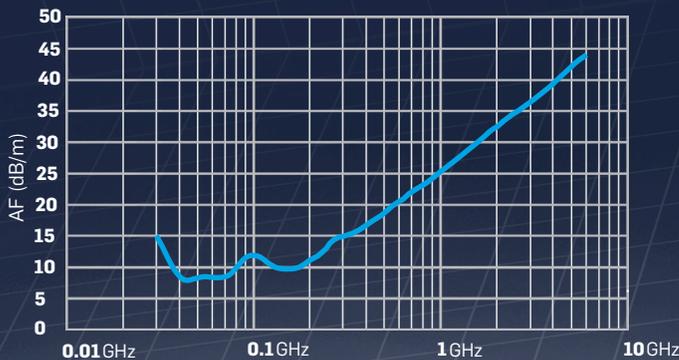

BL-01 - Antenna Factor



DR-01 - Antenna Factor

### Ordering information:

**AS-08 antenna set** 30 MHz to 18 GHz with individual calibration reports.  
**AS-08/TC antenna set** 30 MHz to 18 GHz with typical calibration reports.  
Includes: BL-01 Bi-Conical Log-periodic antenna, DR-01 double-ridged antenna, TR01 wooden column tripod, antenna mounting adapter to change polarization, 5 meter/6 GHz/N(m)-N(m) RF cable, soft carrying case, rigid carrying case (for DR-01), user's manual, calibration reports\*

\*Individual calibration reports are provided with AS-08  
AS-08/TC does not include individual calibration but typical antenna factor reports

### Optional accessories:

**Additional TR-01 set**  
Includes: TR01 60-180 cm wooden column extendable tripod, antenna mounting adapter to change polarization, soft carrying case  
**Additional 5 meter/6 GHz/N(m)-N(m) RF cable**  
**Antenna Mounting kit AMK-02**

## Related products and services

### Receivers

- 7010/00: EMI Receiver 150 kHz to 1 GHz
- 7010/01: EMI Receiver 9 kHz to 1 GHz
- 7010/03: EMI Receiver 9 kHz to 3 GHz
- 9010: EMI Receiver 10 Hz to 30 MHz
- 9010F: EMI Receiver 10 Hz to 30 MHz
- 9010/03P: EMI Receiver 10 Hz to 300 MHz
- 9010/30P: EMI Receiver 10 Hz to 3 GHz
- 9010/60P: EMI Receiver 10 Hz to 6 GHz
- 9030: EMI Receiver 30 MHz to 3 GHz
- 9060: EMI Receiver 30 MHz to 6 GHz
- FR-4003: Field Receiver 9 kHz to 30 MHz

### Antennas

- BC-01: Biconical Antenna 30 to 200 MHz
- LP-02: Log Periodic Antenna 200 MHz to 3 GHz
- LP-03: Log Periodic Antenna 800 MHz to 6 GHz
- LP-04: Log Periodic Antenna 200 MHz to 6 GHz
- TR-01: Antenna Tripod
- VDH-01: Van der Hoofden Test Head 20 kHz to 10 MHz
- Antenna Set AS-02 (BC01+LP02+TR01)
- Antenna Set AS-03 (BC01+LP02+LP03+TR01)
- Antenna Set AS-04 (BC01+LP04+TR01)
- Antenna Set AS-05 (BC01+LP04+DR01+TR01)
- Antenna Set AS-06 (BC01+LP02+LP03+DR01+TR01)
- Antenna Set AS-07 (BL01+TR01)
- RA-01: Rod Antenna 9 kHz to 30 MHz
- RA-01-HV: Rod Antenna 150 kHz to 30 MHz
- RA-01-MIL: Rod Antenna 9 kHz to 30 MHz

### Calibration services

- Ansi 63,5 Antenna Factor
- SAE ARP 958-D
- Free-Space Antenna Factor



L3HARRIS

narda  
Safety Test Solutions

Sales:  
Via Rimini, 22  
20142 Milano - ITALY  
Phone: +39 02 581881  
Fax: +39 02 58188273

E-Mail: [nardait.support@L3Harris.com](mailto:nardait.support@L3Harris.com)  
Internet: [www.narda-sts.it](http://www.narda-sts.it)

Headquarters:  
Via Benesse, 29/B  
17035 Cisano sul Neva (SV) - ITALY  
Phone: +39 0182 58641  
Fax: +39 0182 586400